


**SYSTEM : DEGADUR MOISTURE BARRIER SCREED, DAMPROOFING & WATERPROOFING**

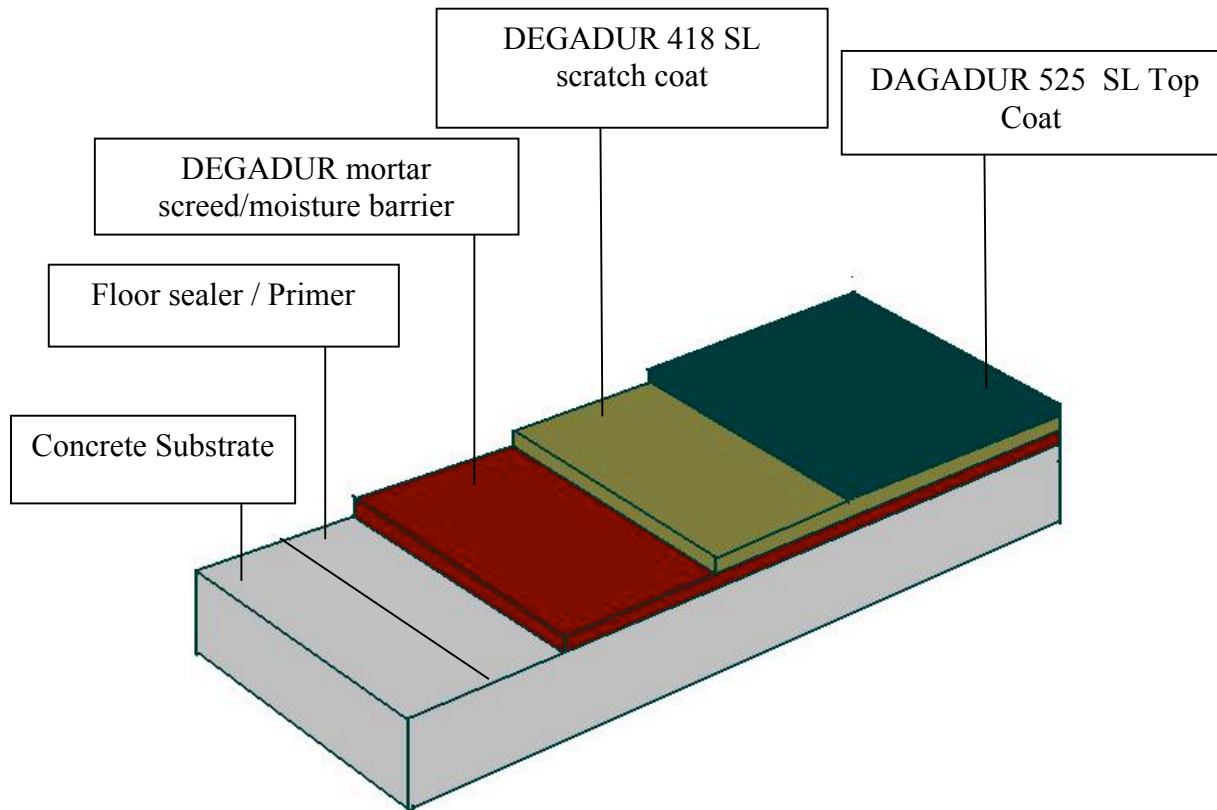

**METHOD STATEMENT**

**1. Surface Preparation**

- intensive roughening and cleaning by dust free and captive steel shot blasting using BLASTRAC machine.
- abrasive grinding by rotating tungsten carbide floor grinder at areas inaccessible to BLASTRAC machine.
- Cleaning by rotating steel brush and sand discs.
- flame cleaning to remove moisture.
- vacuum clean to remove dirt and dust.

**2. Priming**

- apply DEGADUR floor sealer / Primer B71.

**3. Top Coating**

- apply DEGADUR mortar screed moisture barrier by mechanical power-trowel till compaction.
- apply DEGADUR 418 SL scratch coat.
- apply DEGADUR 525 SL top coat to finish.

**\*\*Option: Rough anti-skid finish is available with a broadcast of Quartz Sand.**