


SYSTEM : DEGADUR WATERPROOFING & WEATHERPROOFING & WATER TIGHT

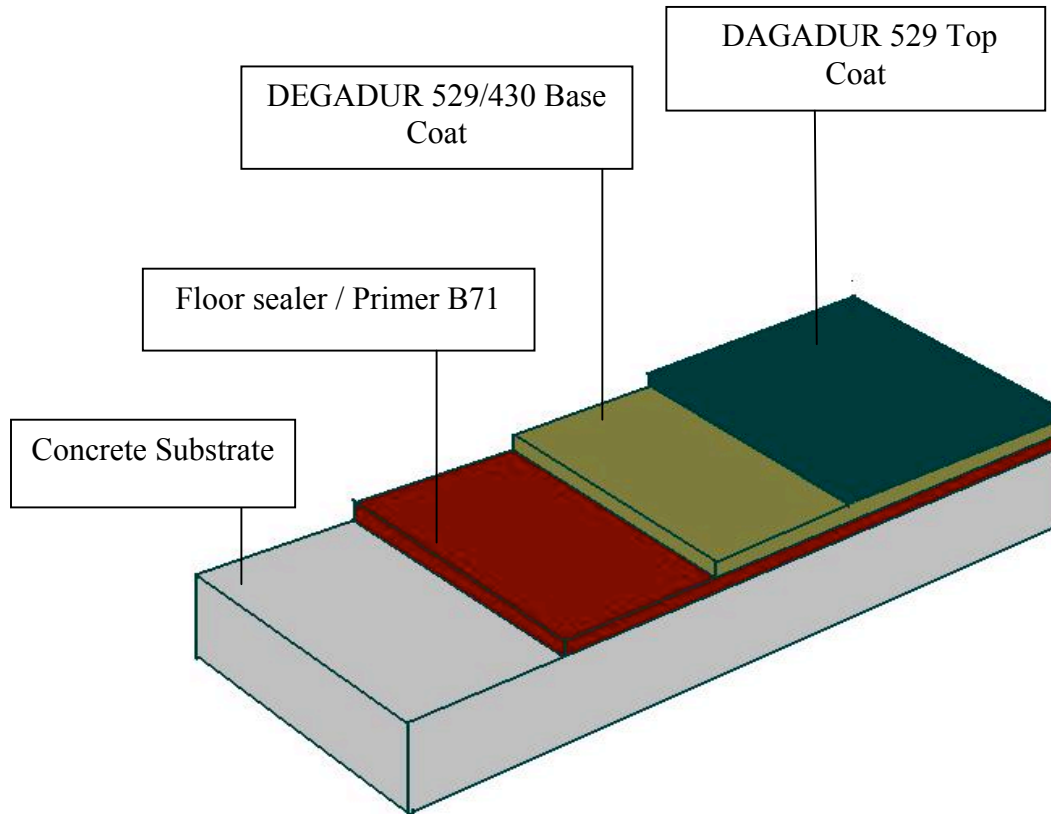

METHOD STATEMENT

1. Surface Preparation

- intensive roughening and cleaning by dust free and captive steel shot blasting using BLASTRAC machine.
- abrasive grinding by rotating tungsten carbide floor grinder at areas inaccessible to BLASTRAC machine.
- cleaning by rotating steel brush and sand discs.
- flame cleaning to remove moisture.
- vacuum clean to remove dirt and dust.

2. Priming

- apply DEGADUR floor sealer / Primer B71.

3. Top Coating

- apply DEGADUR 529/430 base coat by paint rollers/comb squeegee.
- apply DEGADUR 529 to non-slip and smooth finish.

****Option: Anti-skid finish is available with broadcast of Quartz Sand.**